



1, 2, 3 and 4 pole series up to 125AF

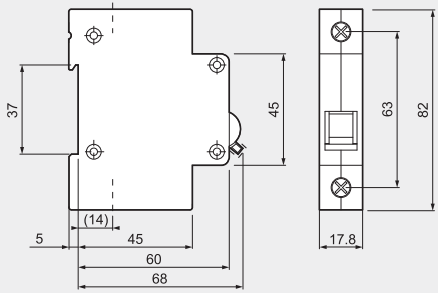
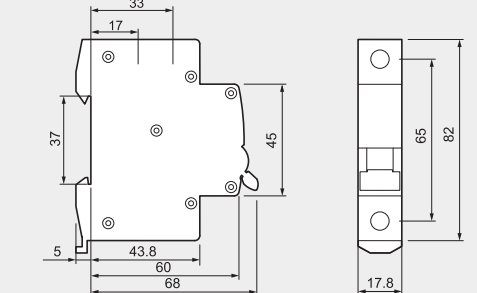
۱، ۲، ۳ و ۴ پل - تا ۱۲۵ آمپر



Type	مدل های مختلف مینیاتوری	MCB			
		BKN	BKN - b		
Protection	نوع حفاظت	Overload and short circuit		Overload and short circuit	
Rated current	جریان نامی	1,2,3,4,6,10,16,20,25,32,40,50,63 A		1,2,3,4,6,10,16,20,25,32,40,50,63 A	
Characteristics	نوع منحنی	B,C,D curve		B,C,D curve	
Poles	تعداد پل ها	1P,1P+N,2P,3P,3P+N,4P		1P,1P+N,2P,3P,3P+N,4P	
Breaking Capacity	قدرت قطع	1pole		1pole	2 ~ 4 pole
		1A~63A 6 KA at 230/400 VAC		1A~63A 10 KA at 240/415 VAC	1A~63A 10 KA at 415 VAC
Standard	استاندارد	IEC 60898		IEC 60898	
Approval	تاییدیه ها	CCC, SABS, SEMKO CB, NF		KEMA CB , SABS , UL 1077 , CE	
Type of trip	نوع تریپ(قطع)	Thermal magnetic release		Thermal magnetic release	
Electrical endurance	عمر الکتریکی	4,000 Operations		4,000 Operations	
Mechanical endurance	عمر مکانیکی	10,000 Operations		10,000 Operations	
Mounting method	طریقه نصب	On 35mm DIN rail		On 35mm DIN rail	
Width	عرض	17.8 mm per pole		17.8 mm per pole	
Terminal	نوع ترمینال	Lug type (cable up to 25 mm <sup>2</sup> )		Lug type (cable up to 25 mm <sup>2</sup> )	
Optional Accessories	تجهیزات جانبی انتخابی				
Auxiliary Switch(AX)	کنتاکت کمکی				
Alarm Switch(AL)	کنتاکت خطا				
Dimension	ابعاد	See drawing 1		See drawing 2	
Characteristic curve	منحنی مشخصه	See curve 1		See curve 1	

نقشه ابعادی ۱، مدل: BKN Drawing 1 Type:

نقشه ابعادی ۲، مدل: BKN-b Drawing 2 Type:

Dimension		
-----------	---	--